


Masoneilan®
Model 8007 and 8008
Electropneumatic Transducers

Specification Data

BS 6500 E

06/03

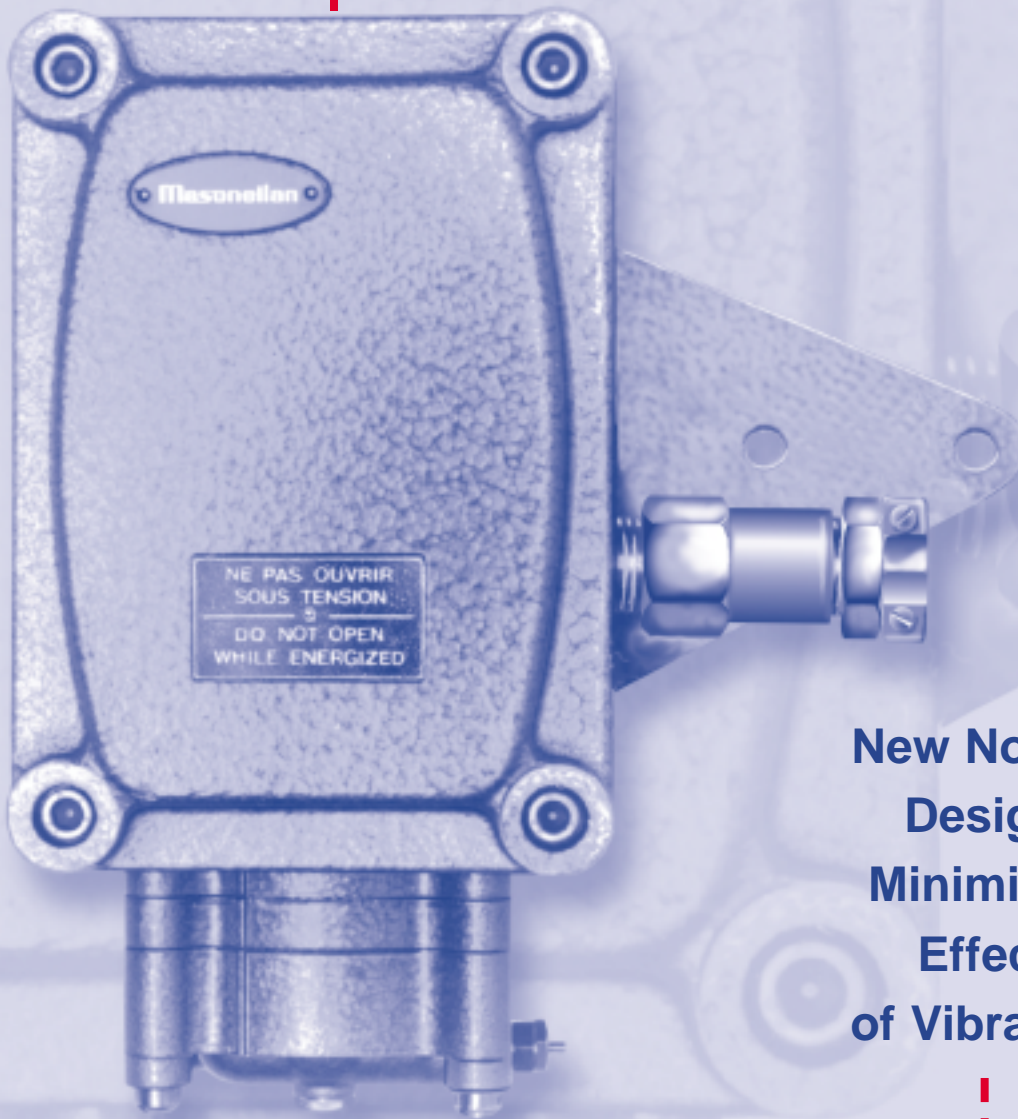

**New Nozzle
Design
Minimises
Effect
of Vibration**



New Nozzle Design Minimises Effect of Vibration

Model 8007 and 8008 electropneumatic transducers convert a low-power DC signal into a proportional pneumatic signal in the 207 to 1035 mbar (3 to 15 psi), or 414 to 2070 mbar (6 to 30psi) range, as appropriate. They are of the force balance type.

Generally speaking, a signal from the Model 8007 is utilised by a pneumatic positioner or a supply relay of the volume booster type.

Model 8008 is fitted with a relay, which allows the transducer output signal to directly control a valve pneumatic actuator.

These transducers are either direct or reverse action. All that is needed to change the direction of operation is to reverse the connections of the signal leads on the terminal board. These transducers can be installed in any position without affecting their operation, and they are not sensitive to radio waves.

Description

Casing : Several mounting plates allow the transducers to be fitted to the yoke of all Masoneilan actuators.

Enclosure Rating for Non-Explosive Atmospheres : IP 6X according to EN 60529.

Approvals for Explosive Atmospheres

ATEX Approvals (94/9/EC Directive)

Explosionproof :

II 2 G/D EEx d IIB + H₂
T6 (Tamb. = -20°C to +68°C)
T5 (Tamb. = -20°C to +80°C)
IP 6X T100°C (Ta +80°C)
N° LCIE 02 ATEX 6088

Intrinsic Safety :

II 1 G/D EEx ia IIC
T6 (Tamb. = -55°C to +40°C)
T4 (Tamb. = -55°C to +80°C)
IP 6X T125°C (Ta +80°C)
N° LCIE 02 ATEX 6058 X

CSA Approvals

(Canadian Standards Association)

Flameproof :

Class I, Group D

Yugoslav Approvals

(S Commission)

Intrinsic Safety :

SIA IIC T6 (Tamb. ≤ +40°C)
SIA IIC T4 (Tamb. ≤ +80°C)


Particulars contained in this publication are for general information only and Masoneilan reserves the right to modify the contents without prior notice. No warranty either expressed or implied is either given or intended.

Tropicalisation : the purpose of this treatment is to protect the transducer from the effects of damp, i.e. fungus and micro-organisms.

Beam Support : the beam is supported on a friction free fulcrum provided by two beryllium copper flexure bearings.


Nozzle : this has been designed so that vibration will have no effect on transducer response.

Fig. 1 : Nozzle Assembly

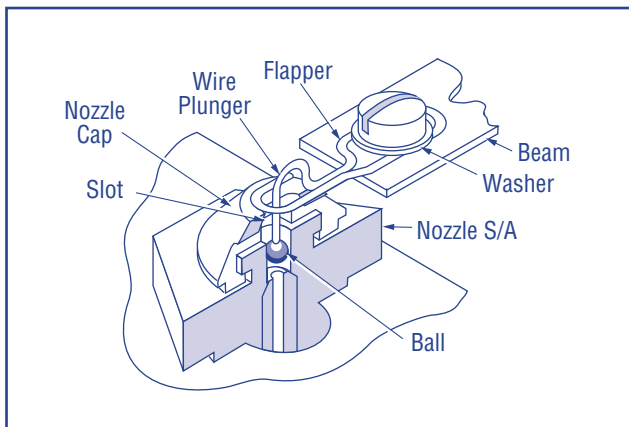

Relay (Model 8008 only) : a diaphragm unit separates the output and nozzle circuits. A double-seated valve controls the flow of supply air to the output and from the output to the exhaust orifice. Supply air enters the nozzle circuit via a metering tube. If necessary, the orifice can be cleared by the manually operated plunger.

Fig. 2 : Relay

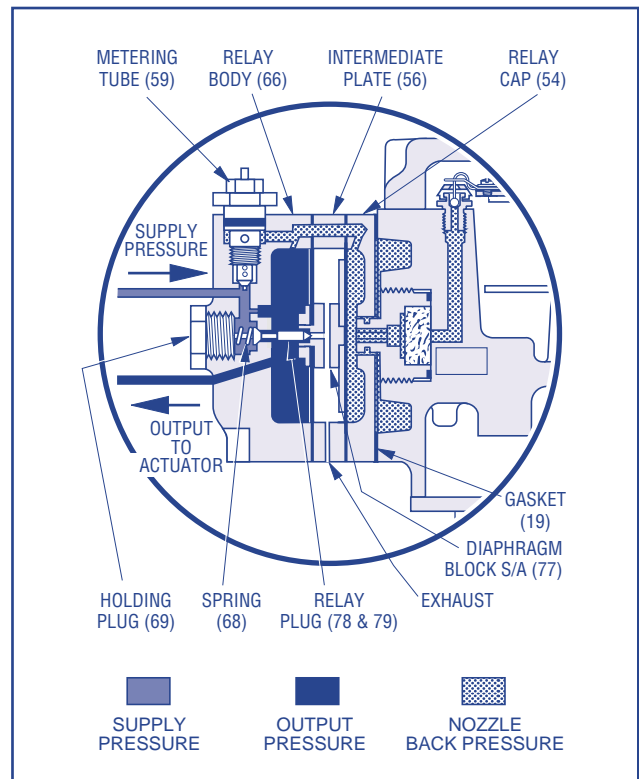

Electrical Circuit :

The input circuit of Model 8007 and 8008 transducers can be adapted to suit DC signals from most electrical controllers. Signal leads are taken into the casing through a 1/2" NPT tapped hole. This connection will accept a cable gland complying with the relevant protection standard.

Pneumatic Circuit : the transducer supply and output connections are tapped 1/4" NPT. They are located on the manifold on Model 8007, and on the relay on Model 8008.

To facilitate pneumatic circuit connection, manifold and relay can be fitted to the transducer in a choice of four different positions.


Coil : windings are epoxy resin impregnated.

Operation

Any variation in the control input signal through the coil changes the gap between flapper and nozzle, causing a change in nozzle back pressure. This change in pressure works in counteracting beam movement until equilibrium is restored. Output pressure is the same as nozzle circuit pressure in Model 8007 transducers.

With direct action, any increase in the input signal brings about an increase in output air pressure. With reverse action, any increase in the input signal brings about a decrease in output air pressure.

Fig. 3 : Sectional View of Transducer (Model 8007 illustrated)

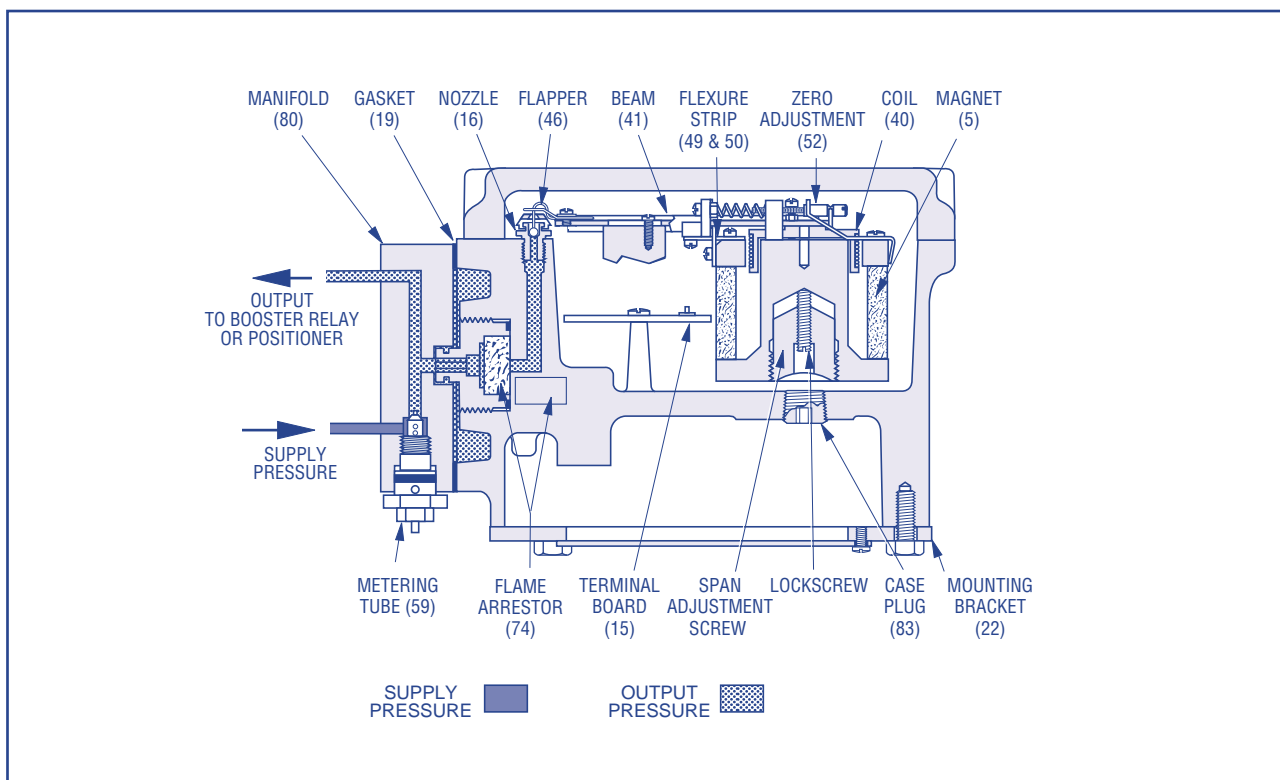

Model 8008, with relay : Supply air enters the circuit via a metering tube. When the flapper blocks off the nozzle, pressure in the nozzle circuit rises. The resulting force moves the diaphragm unit in the direction of the relay plug, and this movement blocks off the vent to atmosphere and releases the supply orifice in the direction of the output. The action of the resulting increase in pressure is to move the diaphragm unit away from the relay plug.

When forces generated by the nozzle and output circuits balance each other, the relay plug no longer allows supply air into the output circuit. A small bleed between supply and output is in fact provided for, and this keeps the relay plug slightly clear of its seat in order to speed up transducer response.

General Data

Electrical Circuit : Resistance of the standard circuit is 216 ohms for a 4 to 20 mA signal (direct current). Some models can be adapted to suit most signals in present use. For intrinsically safe apparatus, 4-20 mA & 216 ohms only. Please see table opposite.

Pressure Table :

Transducer	Supply Pressure		Output Signal Pressure	
	mbar	psi	mbar	psi
Model 8007	1586	23	207 to 1035	3 to 15
Model 8008	1586	23	207 to 1035	3 to 15
	2413	35	414 to 2070	6 to 30

Control Input Signal	Transducer Input Resistance
mA	ohms
1-5	2753
4-20	216
10-50	105
Other signals	To order

Air Consumption :

Transducer	Output Signal	Max. Consumption (Steady State)	Max. Instantaneous Flow Rate
Model 8007	207 to 1035 mbar (3 to 15 psi)	0.30 std. m ³ /h (0.18 scfm)	0.30 std. m ³ /h (0.18 scfm)
Model 8008	207 to 1035 mbar (3 to 15 psi)	0.45 std. m ³ /h (0.26 scfm)	4.30 std. m ³ /h (2.53 scfm)
	414 to 2070 mbar (6 to 30 psi)	0.60 std. m ³ /h (0.35 scfm)	9.00 std. m ³ /h (5.30 scfm)

Working Temperature :

(Refer also to the marking of the apparatus)
 Model 8007 : -20°C to +80°C

-55°C to +80°C (optional).

Model 8008 (standard : Neoprene type polydiene cloth-reinforced membrane) : -20°C to +80°C.

Model 8008 (low temperature instrument : silicon cloth-reinforced membrane) : -55°C to +60°C.

Air Connections : 1/4" NPT.

Effect of Supply Pressure : For a supply pressure of 1586 mbar (23 psi) : 0.75% of output span for a supply pressure variation of 100 mbar (0.5% per psi).

Performance Data :

Hysteresis : 0.8% of output span.

Sensitivity : 0.5% of input span.

Accuracy : ± 1%.


Performance of a system comprising of valve, packing, actuator, transducer and fittings depends on the individual performance of each component.

Breakdown Voltage Test : 500 VAC (1 min test).

Dimensions : see Figure 4.

Net Weight : 3.5 kg (7.7 lbs).

Fig. 4 : Dimensions (in mm)

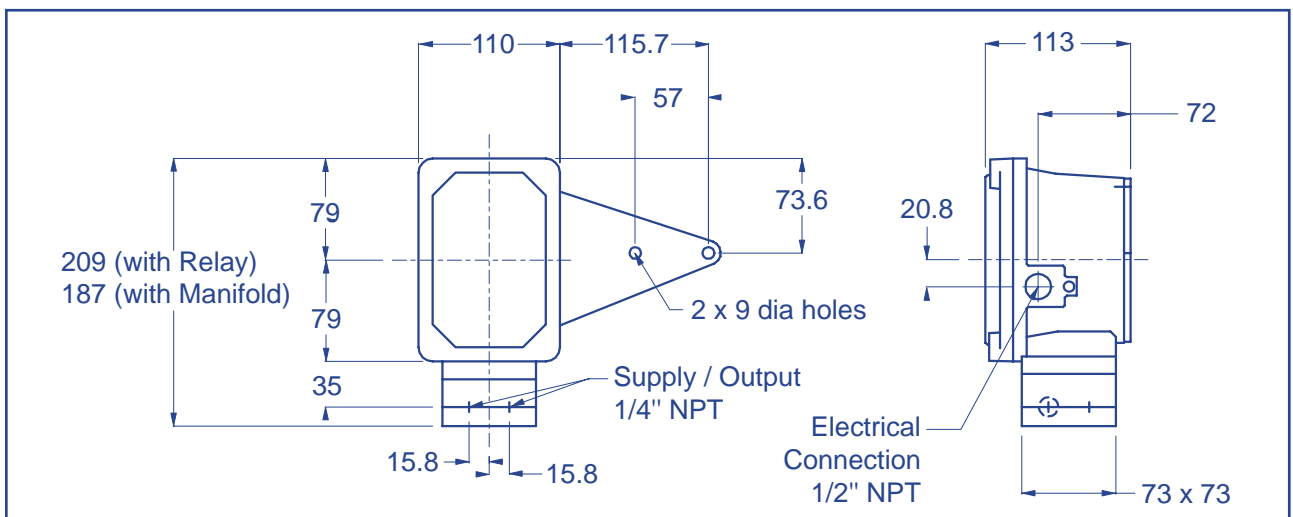

Masoneilan Direct Sales Offices

BELGIUM

Dresser Valves Europe
281-283 Chaussée de Bruxelles, 1190 Brussels
Telephone + 32.2.3440970
Fax + 32.2.3441123

BRAZIL

Dresser Industria e Comercio Ltda.
Rua Senador Vergueiro, 433
09521-320 Sao Caetano Do Sul, Sao Paulo
Telephone + 55.11.453.5511
Fax + 55.11.453.5565

CANADA

Ontario
Dresser - Masoneilan - DI Canada Inc.
5010 North Service Road, Burlington, Ontario L7L 5R5
Telephone + 1.905.335.3529
Fax + 1.905.336.7628

Alberta
Dresser - Masoneilan - DI Canada Inc.
Suite 1300, 311-6th Ave., S.W., Calgary, Alberta T2P 3H2
Telephone + 1.403.290.0001
Fax + 1.403.290.1526

CHINA

Dresser
Suite 2403, Capital Mansion, 6 Xinyuannan Rd.
Chao Yang District, Beijing 100040
Telephone + 86.10.64661164
Fax + 86.10.64660195

FRANCE

Dresser Produits Industriels S.A.S.
4, Place de Saverne, 92971 Paris la Défense Cedex
Telephone + 33.1.49.04.90.00
Fax + 33.1.49.04.90.10

Dresser Produits Industriels S.A.S.
55, rue de la Mouche, 69540 Irigny (Lyon)
Telephone + 33.4.72.39.06.29
Fax + 33.4.72.39.21.93

GERMANY

Dresser Valves Europe GmbH
Heiligenstrasse 75, 41751 Viersen (Dülken)
Telephone + 49.2162.81.700
Fax + 49.2162.81.70.200

Dresser Valves Europe GmbH
Uhlandstrasse 58, 60314 Frankfurt
Telephone + 49.69.439350
Fax + 49.69.4970802

INDIA

Dresser Valve India Pvt. Ltd.
305/306 "Midas" Sahar Plaza, Mathurdas Vasani Road
J.B. Nagar, Andheri East, Mumbai - 400059
Telephone + 91.22.28351134
Fax + 91.22.28354791

Dresser Valve India Pvt. Ltd.
205, Mohta Building, 4, Bhikaiji Cama Place
New Delhi - 110066
Telephone + 91.11.26164175
Fax + 91.11.26165618

ITALY

Dresser Italia S.r.l. - Masoneilan Division
Via Cassano, 77 - 80020 Casavatore, Naples
Telephone + 39.081.7892111
Fax + 39.081.7892208

JAPAN

Niigata Masoneilan CO. Ltd.
20th Floor, Marive East Tower, WBG 2-6 Nakase,
Mihama-Ku, Chiba-shi, Chiba 261-7120
Telephone + 81.43.2979222
Fax + 81.43.2991115

KOREA

Dresser Korea Inc.
2107 Kuk Dong Building
60-1, 3Ka, Choongmu-ro Chung-Ku,
Seoul, 100705
Telephone + 82.2.274.0792
Fax + 82.2.274.0794

KUWAIT

Dresser
Middle East Operations,
10th Floor, Al-Rashed Complex,
Fahad Salem Street,
P.O. Box 242, Safat, 13003
Telephone + 965.9061157
Fax + 965.3718590

MALAYSIA

Dresser Flow Solutions
Business Suite, 19A-9-1, Level 9,
UOA Centre, n° 19, Jalan Pinang,
50450 Kuala Lumpur, West Malaysia
Telephone + 60.3.2163.2322
Fax + 60.3.2163.6312

MEXICO

Dresser Valve de Mexico, S.A. de C.V.
Henry Ford n° 114, Esq. Fulton,
Fracc. Industrial San Nicolas, 54030 Tlalnepantla,
Estado de Mexico
Telephone + 52.5.310.9863
Fax + 52.5.310.5584

THE NETHERLANDS

Dresser Valves Europe
Steenhouwerstraat 11, 3194 AG, Hoogvliet
Mailing address : P.O. Box 640,
NL3190 AN Hoogvliet RT
Telephone + 31.10.438.4122
Fax + 31.10.438.4443

NIGERIA

Dresser Flow Solutions
Plot 293, Akin Olugbade Street
Victoria Island, Lagos, Nigeria
Telephone + 234.1.555.4229
Fax + 234.1.555.7969

RUSSIA

DS Controls
61, Nekhinskaya Street,
Veliky Novgorod 173021
Telephone + 7.8162.157898
Fax + 7.8162.157921

SAUDI ARABIA

Dresser Al Rushaid Valve & Instrument CO.
P.O. Box 10145 - Jubail Industrial City 31961
Telephone + 966.3.341.0278
Fax + 966.3.341.0696

SINGAPORE

Dresser Singapore Pte Ltd.
16, Tuas Avenue 8 - Singapore 639231
Telephone + 65.6.861.6100
Fax + 65.6.861.7172

SOUTH AFRICA

Dresser Ltd., South Africa Branch
P.O. Box 2234, 16 Edendale Road Eastleigh,
Edenvale 1610
Telephone + 27.11.452.1550
Fax + 27.11.452.6542

SPAIN

Masoneilan S.A.
C/Murcia 39 C, 08030 Sant Boi de Llobregat,
Barcelona
Telephone + 34.93.652.6430
Fax + 34.93.661.6444

UNITED ARAB EMIRATES

Dresser - Middle East Operations
P.O. Box 61302, Roundabout 8,
Units JAO1 & JAO2
Jebel Ali Free Zone, Dubai
Telephone + 971.4.8838.752
Fax + 971.4.8838.038

UNITED KINGDOM

DI UK Ltd.
Trevithick Works Gillibrands Estate,
Skelmersdale, Lancashire WN8 9TU
Telephone + 44.1695.52600
Fax + 44.1695.52662

DI UK Ltd.
Unit 4, Suite 1.1, Nobel House,
Grand Union Office Park, Packet Boat Lane,
Uxbridge, Middlesex UB8 2GH
Telephone + 44.1895.454900
Fax + 44.1895.454919

UNITED STATES

Northern Region
Dresser - Masoneilan
85 Bodwell Street
Avon, MA 02322-1190
Telephone + 1.508.586.4600
Fax + 1.508.427.8971

Southern Region
Dresser - Masoneilan
2135 Highway 6 South
Houston, TX 77077
Telephone + 1.281.496.8100
Toll Free + 1.800.847.1099
Fax + 1.281.596.4222

South Texas Operations
Dresser - Masoneilan
4841 Leopard Street
Corpus Christi, TX 78408-2621
Telephone + 1.361.877.2414
Fax + 1.361.584.1196

Masoneilan Aftermarket
Sales & Service Center
16030 Bear Bayou Drive
Channelview, TX 77530
Telephone + 1.281.862.1500
Fax + 1.281.862.1550

Western Region
Dresser - Masoneilan
2950 East Birch Street
Brea, CA 92821
Telephone + 1.714.572.1528
Fax + 1.714.572.1463